



SEA-DOO® Watercraft

OPTIONAL SEAT

◆ **WARNING :** For safety reasons, this kit must be installed by an authorized Bombardier watercraft dealer. Should removal of a locking device be required when undergoing disassembly / assembly, always replace with a new one.

○ **NOTE :** Installation time is 0.1 hour.

PROCEDURE

When replacing the original seat with an optional one, the original WARNING DECAL located on the dashboard must be replaced by the one included in the kit.

To remove warning decal, use a heat gun and peel off slowly.

Clean surface with a good solvent such as ACRYLI-CLEAN DX 330 from PPG or isopropyl alcohol.

○ **NOTE :** For better adhesion, a dry application is recommended. However, to ease decal installation, a mild solution of soapy water can be sprayed over surface where new decal will be installed.


Slowly remove back protective film from decal and align decal on dashboard.

Using a sponge, remove the air bubbles and water surplus working from the center toward the edges.

Allow to dry.

▼ **CAUTION :** Do not apply solvent or isopropyl alcohol directly on decal.

Example For GT Type

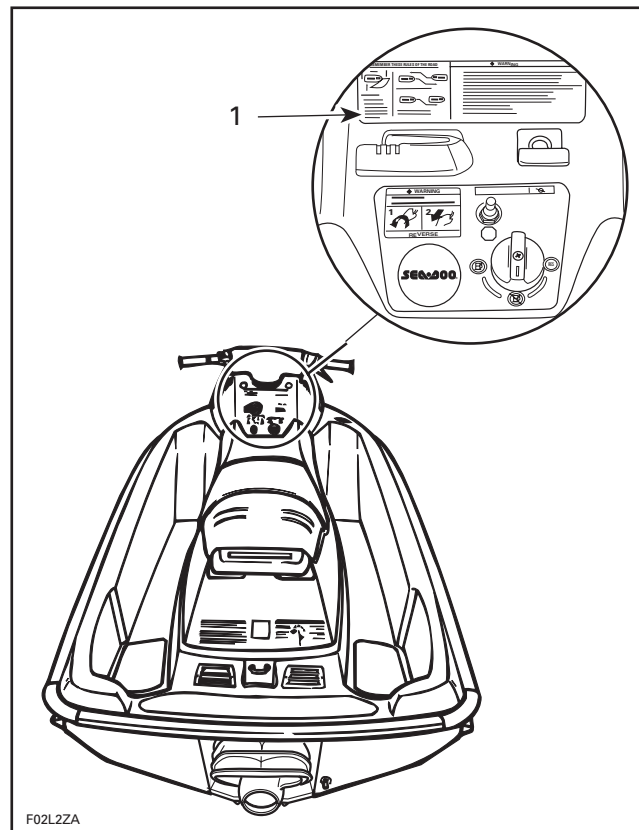

1. Warning decal

Example For SP / XP Types

